

Datasheet

SafeSign PET-X


T-ISS

Product description

Our range of SafeSign PET-X signs contains all the major sign categories, eg. Fire fighting signs, fire control plan signs, prohibition signs, escape/lifesaving appliance signs, hazard signs, mandatory/cargo signs and combination signs. The PET-X signs are made of a modified PET coated photoluminescent sheet with PE closed cell foam tape. The PET material protects the sign from UV and salt water, making it the ideal product for use in the harsh sea climate.

- Halogen & PVC free, incl. self adhesive backing
- Back printed for increased durability
- Glossy, high quality finish, easy to clean
- Expected lifespan of 10 to 15 years.
- 5 year warranty
- UV-resistance, will not discolor

Image

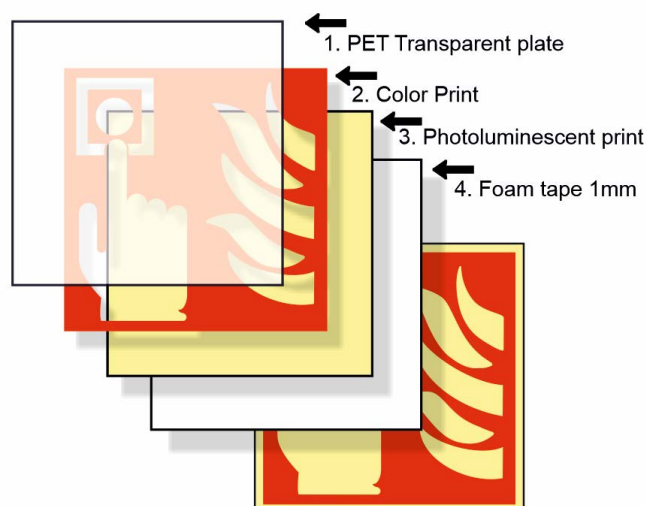

Dimensions

T-ISS produces all types of signs according to required standards.

Sizes:

Width	Height	Thickness	Weight
50 mm	50 mm	1,8 mm	0,004 kg
75 mm	150 mm	1,8 mm	0,018 kg
100 mm	300 mm	1,8 mm	0,031 kg
150 mm	150 mm	1,8 mm	0,036 kg
200 mm	150 mm	1,8 mm	0,041 kg
300 mm	150 mm	1,8 mm	0,066 kg
450 mm	150 mm	1,8 mm	0,106 kg

(Other possible sizes on request.)

HS Code : 39199000.99

Certificates & Standards

- Green Passport
- DNV-GL certificate module B & D
- Halogen-free material
- Compliant with IMO Res. A760(18) as amended ISO 17631:2002.
- Our PET signs are made of recycled materials and are environmentally friendly.
- Approved according to ISO 16069

Applications & Use

Installation

The recommended height for installation of the SafeSign PET-X signs is approx. 160 cm from the floor level.

Specifications

- Design- Symbols comply with international standards
Custom made - all text possible
- Quality:
SafeSign XL
SafeSign XXL on request
- Photoluminescence

SafeSign XL	10 min: 75mcd/m ²	Decay time: 1250 m
	60 min: 10 mcd/m ²	

 - XXL performance
200mcd/10min
40mcd/60min
decay 0.3mcd/in 2300min



T +31(0) 315 65 60 60
Helmkamp 32-34

F +31(0) 315 65 60 63
7091 HR Dinxperlo

E info@t-iss.com
The Netherlands

I t-iss.com
Europe

T-ISS

Safety Suppliers